
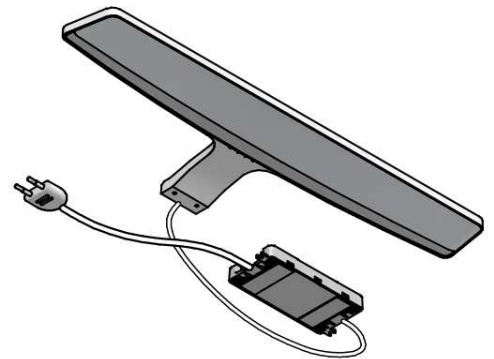


MODEL: APLIQUE NAYRA S-2 BCO C/CLAV LED CII IP44 1X6W 493MM 4000°K

CODE: E26503CI/1316

DIMENSIONS OF PRODUCT:

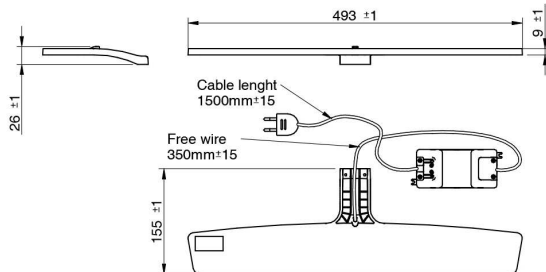

CRITERIA OF EXTERIOR ASPECT(RE-33033):

QUALITY OF POLISHED SURFACE:

SURFACES :

- 1- Support plate:
- 2- Top and side:
- 3- Front and bottom:

QUALITY SYMBOLS

- NORMAL
- GOOD
- VERY GOOD

MATERIALS AND DECORATIONS:

Metal: PC/Inox Finish: white
PC protector

FIXING TO SURFACE:

A cabinet

BOXING

INSIDE	UNITS	MEASUREMENTS "mm"			WEIGHT "kg"	VOLUME "m3"	COMPONENTS
Box	1	0,033	0,17	0,5	0,49	0,002805	1 Applied 1 Bag with screws 2 Instruction sheet 1 Led module installed in luminaire
OUTSIDE							
Lot box	10	0,18 x 0,35 x 0,515			7,1	0,032445	10 Individual boxes by batch
Palet	400	1,95 x 0,8 x 1,2			304	1,872000	40 Industrial boxes x 10 individual

MANUFACTURING REQUIREMENTS:

Minimum of production: 500 Un.
Delivery time: 55 Working days

SPARE

E25909- Driver 6W 350mA;E26512El.-Accesorios Bag;25789.- 2P Europlug connection

ELECTRIC POWER

Nominal voltage	Power	Lamp holder	Lamp		Connexion to network
220-240V~50Hz	MAX 1X6W			A+	Using driver 6w 350mA and europlug

STANDARIZATION AND CLASSIFICATION

UNE-EN 60598

IP44

0,10m

certificate nº
WTF16F0142129E-EMC
WTF16F0142128S-LVD

ILLUMINANCE AND LIGHT SOURCE

Light temp	life bulb	Lux		Direction of light 180°
4000K	45000h	1) 990		
	Lumens	2) 325		
	4) 0	3) 110		

ECO DESIGN

RoHS COMPLIANT 2002/95/EC

Ecological impact value

0,667